
# BARIX

# **Instreamer ICE**

AAC+ / MP3 Encoder and Icecast Server.



The Instreamer ICE encodes analog audio into MP3 or AAC+ for streaming to an Icecast internet radio streaming service in the cloud. The Instreamer ICE also has an Icecast server built in and is able to feed up to 100 web radio listeners directly without the requirement to subscribe to an internet radio service provider.

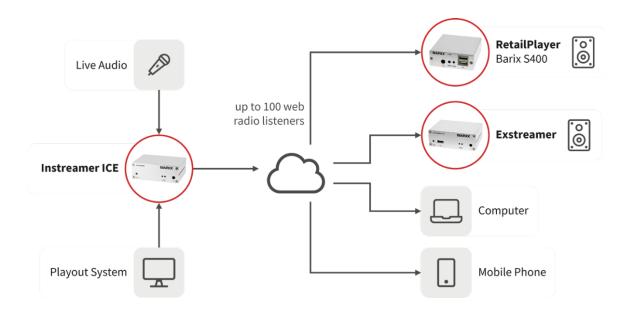

#### Applications

- Live audio encoder for internet streaming applications, even with authentication
- Icecast source encoder
- Audio encoding for HTTP based distribution
- Stream relay (stream forwarding)

#### Features

- MP3, AAC encoding
- Integrated Icecast server for up to 100 simultaneous web radio users
- Line level input (mono, stereo)
- Supply voltage 5VDC

# **Technical Specifications**

#### **Power Supply Input**

- External power adaptor, 100-240VAC, 10W
- Male connector: 5,5 x 2,1 mm

#### **Ethernet Interfaces**

• RJ45 10/100 auto detect, IPv4, IPv6

#### **Audio Input**

 Stereo RCA / cinch connectors 2kΩ input impedance 3.9 Vpp max, adjustable in sensitivity Dynamic range 87 dB, SNR -87 dB

#### Audio formats

- MP3, AAC mono and stereo
- Sample rates 22.05/24/32/44.1/48Khz
- Supported bit rates 10kb/s to 192 kb/s

#### Icecast

- Integrated Icecast server: supports up to 100 subscribers
- Source to external Icecast server
- Stream relay external Internet radio streams

#### **Headphone output**

• Female Jack 3.5 mm

#### USB

• Double USB connector type A female (for future use)

#### RS-232

· For metadata insertion to internal Icecast server

#### HW/SW environment

- Barix IPAM400 Processor Module
- Linux with dual boot recovery and remote firmware update capability

#### **User Interface**

- Web interface for control, status and configuration
- HW reset button, LEDs for status

#### **Case & Weight**

- Aluminum
- 108x38x78.7mm (4.25x1.5x3.1 inch)
- Weight 250g

#### MTBF

• > 199'951h / 22 years

#### Warranty

Warranty: two years

## Environmental

#### **Operating Environment**

0 to +50°C / 32 to 122°F 0 - 70% relative humidity, non-condensing

#### **Storage Conditions**

-20 to +70°C / -4 to 158°F 0 - 70% relative humidity, non-condensing

### Certifications

CE, RoHS, FCC

## **Ordering Information**

2018\_9237\_Instreamer ICE EU Package 2018\_9238\_Instreamer ICE US Package 2018\_9239\_Instreamer ICE UK Package 2018\_9240\_Instreamer ICE NoPSU Package



For commercial related questions (distributors contacts, price list, business opportunities) please contact: <a href="mailto:sales@barix.com">sales@barix.com</a>



For technical inquiries (problem reports, request for documentation, etc.) please contact: <a href="mailto:support@barix.com">support@barix.com</a>

**Barix AG** 

Limmatstrasse 21, 8005 Zürich, Switzerland Phone: +41 434 33 22 11 www.barix.com

© Barix AG 2021, all rights reserved. All information is subject to change without notice. All mentioned trademarks belong to their respective owners and are used for reference only. Product Sheet V3.2



**Direct Link**